



REV.	ECN NO.	Revision record	Date

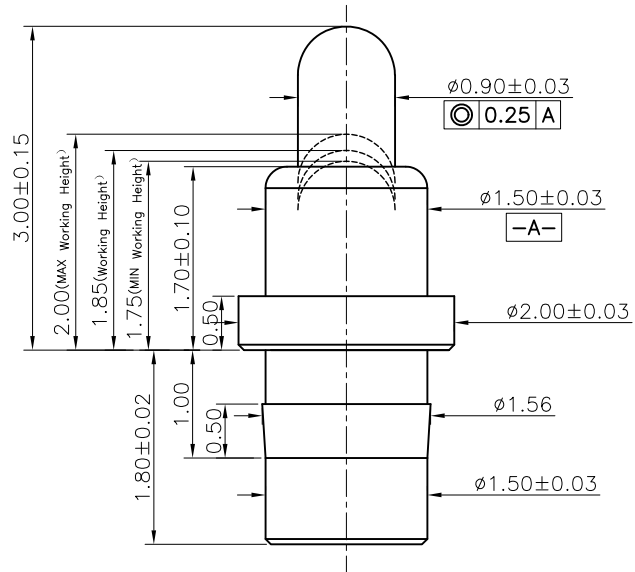

Recommended Housing Hole Size

Notes:

- 1 Mechanical performance
Working Height Force: 60±20gf
Durability:10000 Cycles
- 2 Electrical performance
Current rating: 1A
Voltage rating: 36VAC/DC
Dynamic Resistance:300mOhm Max.
- 3 Environmental performance
RoHS & HF compliant.
Salt Spray: 48h Min
Operating Temperature range: -40°C~+85°C
- 4 Packaging:
Carrier tape

4	Cap	1	High temp Plast UL94 V-0	Black
3	Body	1	Lead free Brass	plating Ru-Rh 4u" min Color Silver
2	Plunger	1	Lead free Brass	Au 4u" min plafd over 60um" min Ni
1	Spring	1	Stainless steel wire	-----
Item	Part Name	Q'TY	Material	Finish

UNLESS OTHERWISE SPECIFIED
DIMENSION ARE IN MILLIMETERS
TOLERANCE ARE :
FRACTION DECIMALS ANGLES

Shenzhen Chunni Electronics Co. Ltd.

.X ±0.15 .XX ±0.10 .XXX ±0.05	X' ±2.0' .X' ±1.5' .XX' ±1.0'	DRAWN	Tony	Title:	Pogo PIN
		CHECKED	Tony	Part NO:	CNH15030-0138
		APPROVED		Customer NO:	NA
	Scale: 1:1	CONFIDENTIAL		Page:	1/1
	Unit: mm			Rev:	01